


Schedule B

Summary of Vehicle Weights and Dimensions
Limits by Configuration

Category 1: Tractor Semitrailer
Part 1 - Dimension Limits

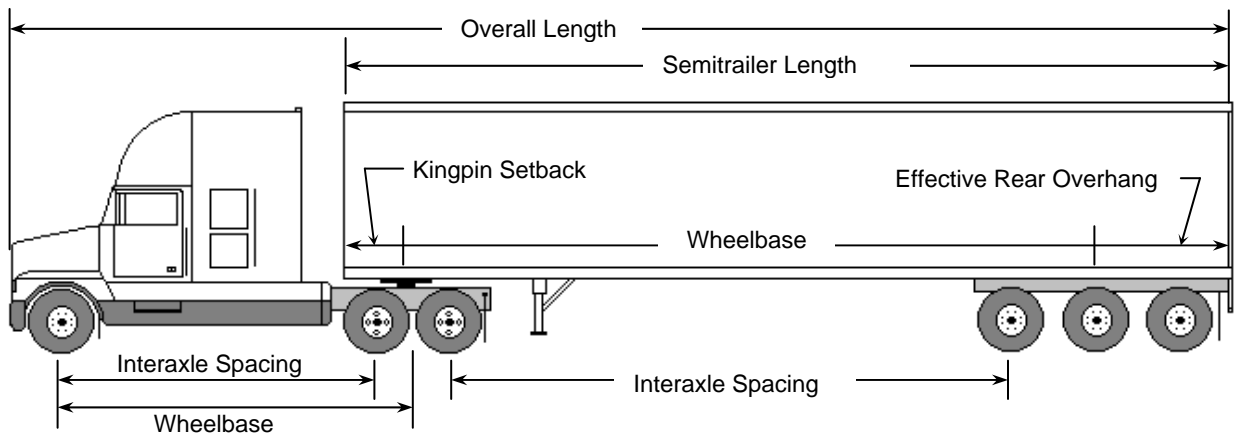

DIMENSION	LIMIT
Overall Length	Maximum 23 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Tractor:	
Wheelbase ⁸	Maximum 6.2 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Semitrailer	
Length	Maximum 16.2 m
Wheelbase	Minimum 6.25 m/Maximum 12.5 m
Kingpin Setback	Maximum 2.0 m radius
Effective Rear Overhang	Maximum 35% of wheelbase


⁸ The tractor wheelbase can be up to 7.2 m in a tractor-semitrailer configuration, provided the wheelbase of the semitrailer is reduced in accordance with Table A.

DIMENSION	LIMIT
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Tridem Axle Spread	Minimum 2.4 m/Maximum 3.7 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ⁹	Minimum 2.45 m/Maximum 2.6 m
Interaxle Spacings	
Single Axle to Single, Tandem or Tridem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m
Tandem Axle to Tridem Axle	Minimum 5.5 m

⁹ See note 4.

Category 1: Tractor Semitrailer

Part 2 - Weight Limits

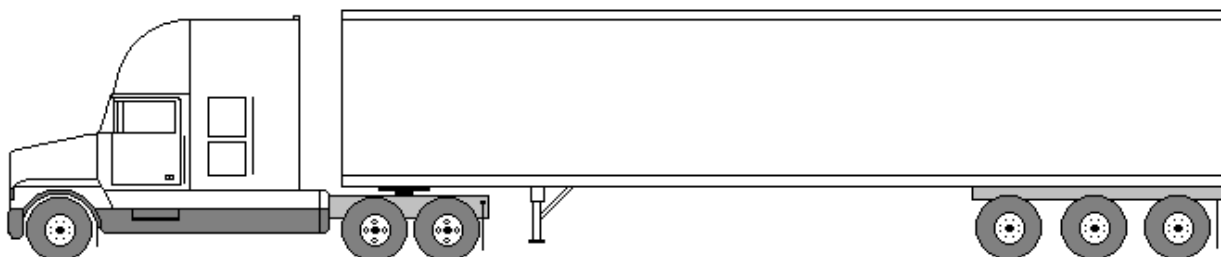

Max 5500 kg*

Single Axle - Max 9100 kg
Tandem Axle - Max 18 000 kg

Single Axle - Max 9100 kg
Tandem Axle - Max 18 000 kg
Tridem Axle - Spread:
2.4 m to < 3.0 m - Max 21 000 kg
3.0 m to < 3.6 m - Max 24 000 kg
3.6 m to 3.7 m - Max 26 000 kg

WEIGHT ^{10 11}	LIMIT
Axle Weights:	
Steering Axle	Maximum 5500 kg*
Single Axle (dual tires)	Maximum 9100 kg
Tandem Axle:	
Axle Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Tridem Axle:	
Axle Spread 2.4 m - less than 3.0 m	Maximum 21 000 kg
Axle Spread 3.0 m - less than 3.6 m	Maximum 24 000 kg
Axle Spread 3.6 m - 3.7 m	Maximum 26 000 kg
Gross Vehicle Weight Limits	
Three Axles	Maximum 23 700 kg

¹⁰ When an axle, other than a steering axle, is fitted with two single tires, each of which has a width of 445 mm or greater, the weight cannot exceed 7700 kg for single axles, 15,400 kg for tandem axle groups, 21,000 kg for tridem axle groups with spread from 2.4 m to <3.0 m, 23,000 kg for tridem axle groups with spread from 3.0 m to <3.6 m and 23,100 kg for tridem axle groups with spread from 3.6 m to 3.7 m.

¹¹ An additional allowance of up to 225 kg will be provided on the combined weight of the tractor steering axle and drive axle group of a vehicle in *Category 1: Tractor-Semitrailer* if the tractor is equipped with a functioning Auxiliary Power Unit. In such cases the Gross Vehicle Weight limit for the combination will also increase up to a maximum of 225 kg to accommodate the increased weight of the tractor.


WEIGHT^{12 13}	LIMIT
Four Axles	Maximum 32 600 kg
Five Axles	Maximum 41 500 kg
Six Axles - with 2.4 to < 3.0 m spread tridem	Maximum 44 500 kg
with 3.0 m to < 3.6 m spread tridem	Maximum 47 500 kg
with 3.6 to 3.7 m spread tridem	Maximum 49 500 kg

* The steering axle weight can be as high as 9100 kg provided the load carrying capacity of the axle, tires and all other components is not exceeded, and the tire loading does not exceed 10 kg per mm of width. However, the Gross Vehicle Weight limit will be based on a steering weight of 5500 kg.

¹² See note 10.

¹³ See note 11.

Category 1A: Tridem Drive Tractor Semitrailer
Part 1 - Dimension Limits

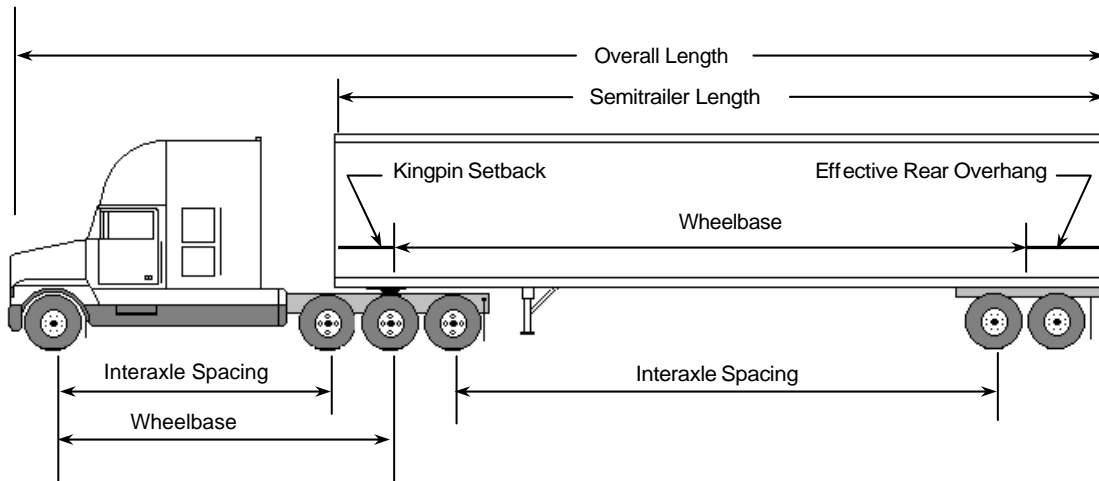

DIMENSION	LIMIT
Overall Length	Maximum 23.5 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Tractor:	
Wheelbase	Minimum 6.6 m/Maximum 6.8 m
Tridem Axle ¹⁴ Spread	Minimum 2.4 m/Maximum 2.8 m
Semitrailer	
Length	Maximum 16.2 m
Wheelbase Single, Tandem or Tridem	Minimum 6.25 m/Maximum 12.0 m
Kingpin Setback	Maximum 2.0 m radius
Effective Rear Overhang	Maximum 35% of wheelbase
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Tridem Axle Spread	Minimum 2.4 m/Maximum 3.7 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ¹⁵	Minimum 2.45 m/Maximum 2.6 m


¹⁴ Each axle of the tridem axle must transmit tractive power to its wheels.

¹⁵ See note 4.


DIMENSION	LIMIT
Interaxle Spacings	
Single Axle to Tridem Axle	Minimum 3.0 m
Tandem Axle to Tridem Axle	Minimum 5.5 m
Tridem Axle to Tridem Axle	Minimum 6.0 m

Category 1A: Tridem Drive Tractor Semitrailer

Part 2 - Weight Limits

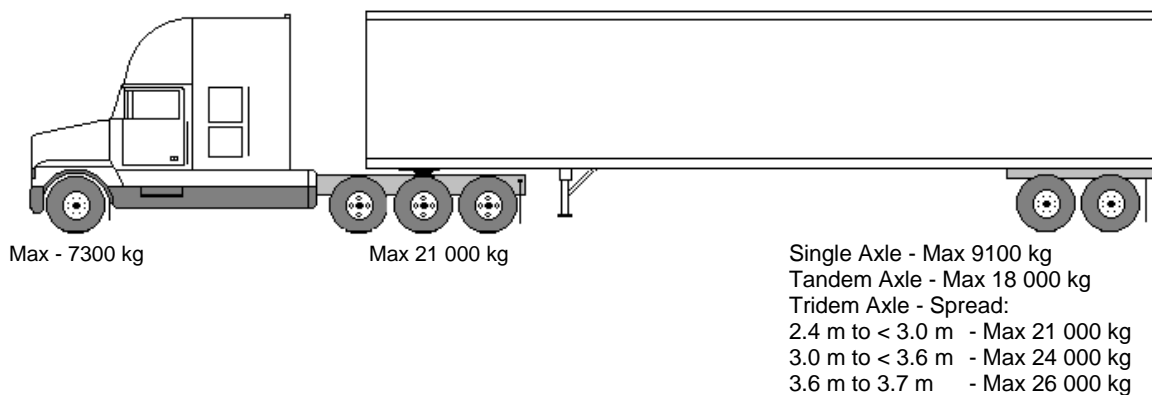

WEIGHT		LIMIT
Axle Weights:		
Steering Axle		Maximum 7300 kg
Single Axle (dual tires)		Maximum 9100 kg
Tandem Axle:		
Axle Spread 1.2 m to 1.85 m		Maximum 18 000 kg
Tridem Axle:		
Tractor Drive Axle Spread 2.4 m to 2.8 m		Maximum 21 000 kg
Semitrailer Axle Spread 2.4 m - less than 3.0 m		Maximum 21 000 kg
Semitrailer Axle Spread 3.0 m - less than 3.6 m		Maximum 24 000 kg
Semitrailer Axle Spread 3.6 m - 3.7 m		Maximum 26 000 kg
Gross Vehicle Weight Limits		
Single Axle Semitrailer		Maximum 37 400 kg
Tandem Semitrailer		Maximum 46 300 kg
Tridem Semitrailer with 2.4 to < 3.0 m spread		Maximum 49 300 kg
with 3.0 m to < 3.6 m spread		Maximum 52 300 kg
with 3.6 to 3.7 m spread		Maximum 54 300 kg

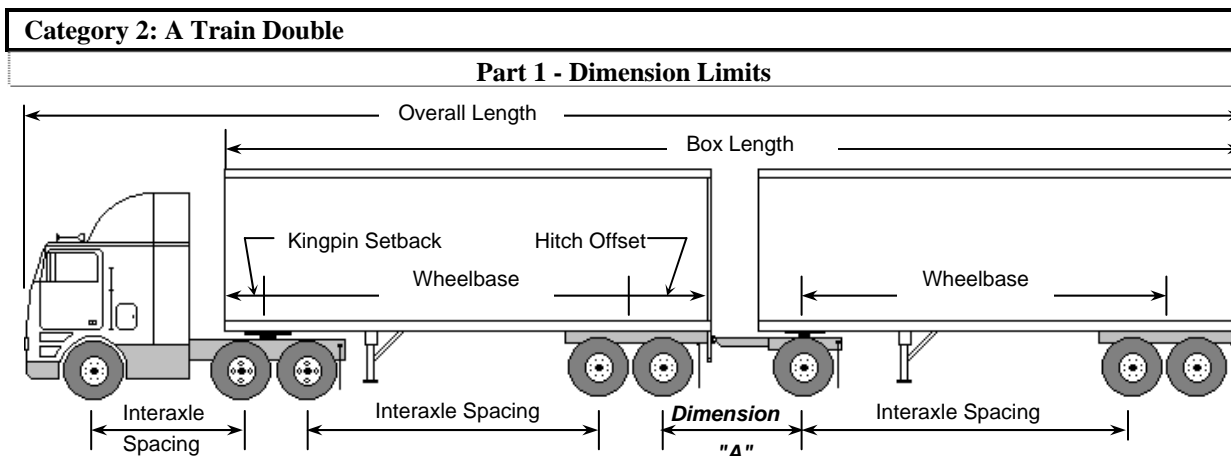


DIMENSION	LIMIT
Overall Length	Maximum 25 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Maximum 20 m
Tractor:	
Wheelbase	Maximum 6.2 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Lead Semitrailer	
Wheelbase	Minimum 6.25 m
Kingpin Setback	Maximum 2.0 m radius
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Hitch Offset	Maximum 1.8 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ¹⁶	Minimum 2.45 m/Maximum 2.6 m
Second Semitrailer or Full Trailer	
Wheelbase	Minimum 6.25 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ¹⁷	Minimum 2.45 m/Maximum 2.6 m

¹⁶ See note 4.

¹⁷ See note 4.

DIMENSION	LIMIT
Interaxle Spacings	
Single Axle to Single or Tandem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m
Dimension "A" (from the centre of last axle on the lead semitrailer to the centre of the first axle on the converter dolly or second trailer)	Not controlled

Category 2: A Train Double
Part 2 - Weight Limits

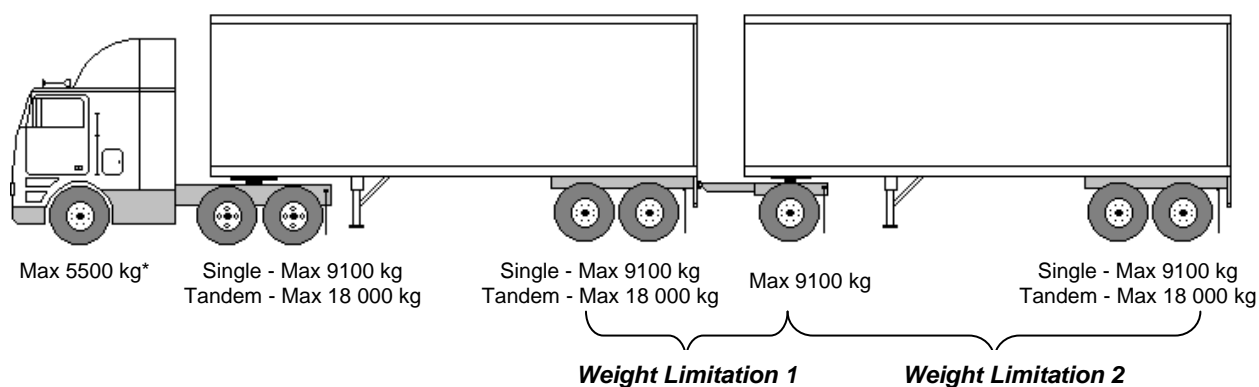

WEIGHT ¹⁸	LIMIT
Axle Weight Limits:	
Steering Axle	Maximum 5500 kg*
Single Axle (dual tires)	Maximum 9100 kg
Tandem Axle:	
Axle Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Weight Limitation 1: Sum of Axle Weights of Lead Semitrailer Plus Weight of Converter Dolly Axle	If Dimension "A" is less than 3 metres, the weight of the axle(s) on the lead semitrailer plus the weight of the converter dolly axle(s) is limited to a maximum of 18,000 kg for a two axle group or a maximum of 24,000 kg for a three axle group.
Weight Limitation 2: Sum of Axle Weights of Full Trailer or Second Semitrailer	The weight of the second trailer must not exceed the weight of the tractor drive axle(s) plus the weight of the axle(s) on the first semitrailer.
Gross Vehicle Weight Limits:	
Five Axles	Maximum 41 900 kg
Six Axles	Maximum 50 800 kg
Seven Axles	Maximum 53 500 kg


¹⁸ When an axle, other than a steering axle, is fitted with two single tires, each of which has a width of 445 mm or greater, the weight cannot exceed 7700 kg for single axles and 15,400 kg for tandem axle groups.

WEIGHT¹⁹	LIMIT
Eight Axles	Maximum 53 500 kg

*The steering axle weight can be as high as 9100 kg provided the load carrying capacity of the axle, tires, and all other components is not exceeded, and the tire loading does not exceed 10 kg per mm of width. However, the Gross Vehicle Weight limit will be based on a steering axle weight of 5500 kg.

¹⁹ See note 18.

Category 3: B Train Double
Part 1 - Dimension Limits

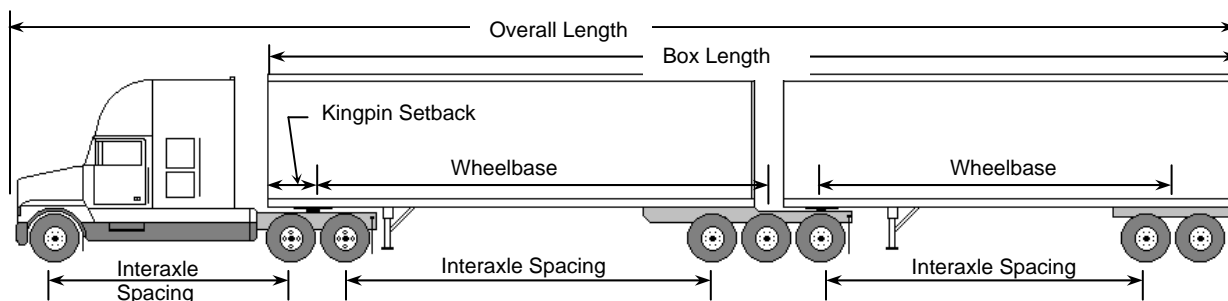

DIMENSION	LIMIT
Overall Length	Maximum 27.5 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Maximum 20.0 m
Tractor:	
Wheelbase	Maximum 6.2 m ²⁰
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Lead Semitrailer	
Wheelbase	Minimum 6.25 m
Kingpin Setback	Maximum 2.0 m radius
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Tridem Axle Spread	Minimum 2.4 m/Maximum 3.1 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ²¹	Minimum 2.45 m/Maximum 2.6 m
Fifth Wheel Position	No more than 0.3 m behind the centre of the rearmost axle on the semitrailer
Second Semitrailer	
Wheelbase	Minimum 6.25 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m


²⁰ The tractor wheelbase can exceed 6.2 metres, up to a maximum of 6.8 metres, provided the sum of the semitrailer wheelbases is reduced in accordance with Table B.

²¹ See note 4.

DIMENSION	LIMIT
Tridem Axle Spread	Minimum 2.4 m/Maximum 3.1 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ²²	Minimum 2.45 m/Maximum 2.6 m
Sum of Semitrailer Wheelbases	Maximum 17.0 m
Interaxle Spacings	
Single Axle to Single or Tandem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m
Tandem Axle to Tridem Axle	Minimum 5.5 m

²² See note 4.

Category 3: B Train Double
Part 2 - Weight Limits

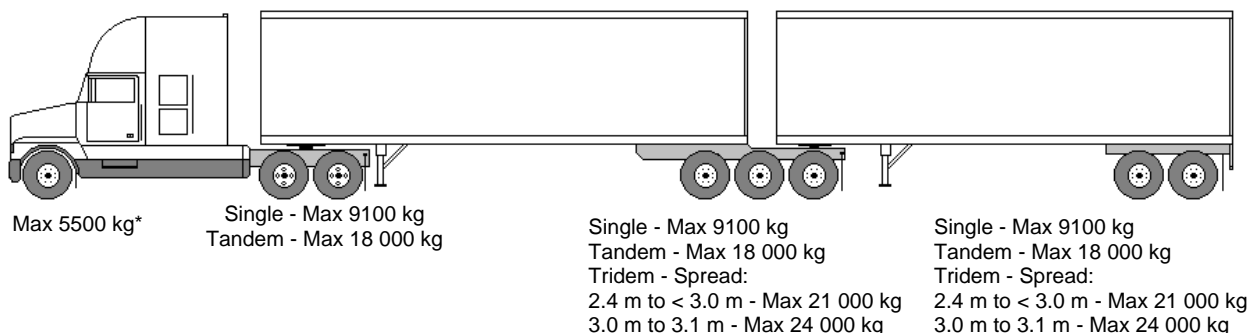


WEIGHT ²³	LIMIT
Axle Weight Limits:	
Steering Axle	Maximum 5500 kg*
Single Axle (dual tires)	Maximum 9100 kg
Tandem Axle:	
Axle Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Tridem Axle:	
Axle Spread 2.4 m to less than 3.0 m	Maximum 21 000 kg
Axle Spread 3.0 m to 3.1 m	Maximum 24 000 kg
Gross Vehicle Weight Limits:	
Six Axles	Maximum 50 600 kg
Seven Axles	Maximum 59 500 kg
Eight Axles	Maximum 62 500 kg
Nine Axles	Maximum 62 500 kg

* The steering axle weight can be as high as 9100 kg provided the load carrying capacity of the axle, tires, and all other components is not exceeded, and the tire loading does not exceed 10 kg per mm of width. However, the Gross Vehicle Weight limit will be based on a steering axle weight of 5500 kg.

²³ When an axle, other than a steering axle, is fitted with two single tires, each of which has a width of 445 mm or greater, the weight cannot exceed 7700 kg for single axles, 15,400 kg for tandem axle groups, 21,000 kg for tridem axle groups with spread from 2.4 m to <3.0 m and 23,000 kg for tridem axle groups with spread from 3.0 m to 3.1 m.

Category 4: C Train Double
Part 1 - Dimension Limits

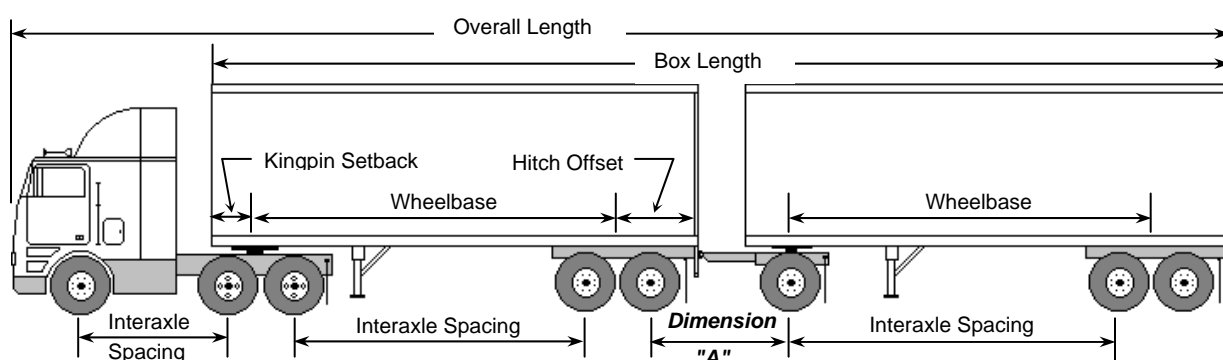

DIMENSION	LIMIT
Overall Length	Maximum 25 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Maximum 20.0 m
Tractor:	
Wheelbase	Maximum 6.2 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Lead Semitrailer	
Wheelbase	Minimum 6.25 m
Kingpin Setback	Maximum 2.0 m radius
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Hitch Offset	Maximum 1.8 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ²⁴	Minimum 2.45 m/Maximum 2.6 m
Second Semitrailer or Full Trailer	
Wheelbase	Minimum 6.25 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ²⁵	Minimum 2.45 m/Maximum 2.6 m


²⁴ See note 4.

²⁵ See note 4.

DIMENSION	LIMIT
C Dolly Drawbar Length	Maximum 2.0 m
Interaxle Spacings	
Single Axle to Single or Tandem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m
Dimension "A" (from the centre of last axle on the lead semitrailer to centre of the first axle on the converter dolly or second trailer)	Not controlled

Category 4: C Train Double

Part 2 - Weight Limits

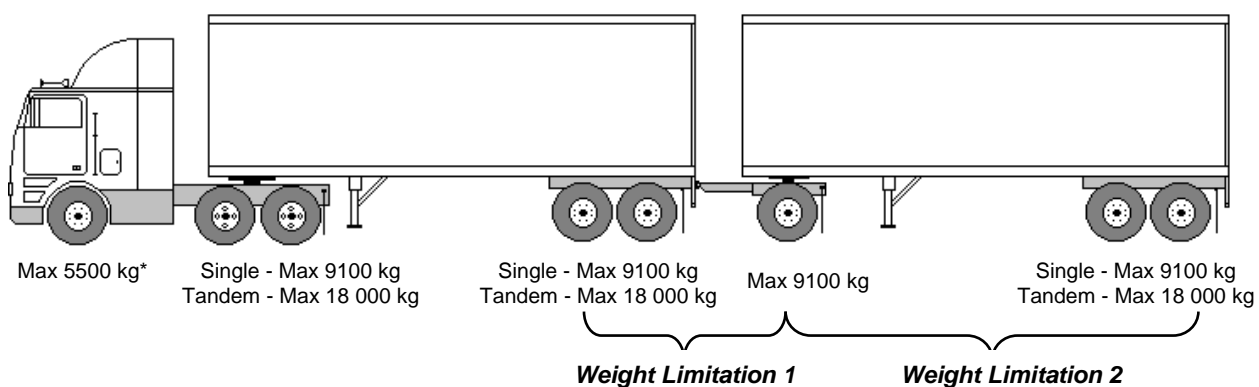


WEIGHT ²⁶	LIMIT
Axle Weight Limits:	
Steering Axle	Maximum 5500 kg*
Single Axle (dual tires)	Maximum 9100 kg
Tandem Axle:	
Axle Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Weight Limitation 1: Sum of Axle Weights of Lead Semitrailer Plus Weight of Converter Dolly Axle	If Dimension "A" is less than 3 metres, the weight of the axle(s) on the lead semitrailer plus the weight of the converter dolly axle(s) is limited to a maximum of 18,000 kg for a two axle group or a maximum of 24,000 kg for a three axle group.
Weight Limitation 2: Sum of Axle Weights of Full Trailer or Second Semitrailer	The weight of the second trailer must not exceed the weight of the tractor drive axle(s) plus the weight of the axle(s) on the first semitrailer.
Gross Vehicle Weight Limits:	
Five Axles	Maximum 41 900 kg
Six Axles	Maximum 50 800 kg
Seven Axles	Maximum 55 600 kg
Eight Axles	Maximum 58 500 kg

²⁶ See note 18.

- * The steering axle weight can be as high as 9100 kg provided the load carrying capacity of the axle, tires, and all other components is not exceeded, and the tire loading does not exceed 10 kg per mm of width. However, the Gross Vehicle Weight limit will be based on a steering axle weight of 5500 kg.

Category 5: Straight Truck

Part 1 - Dimension Limits

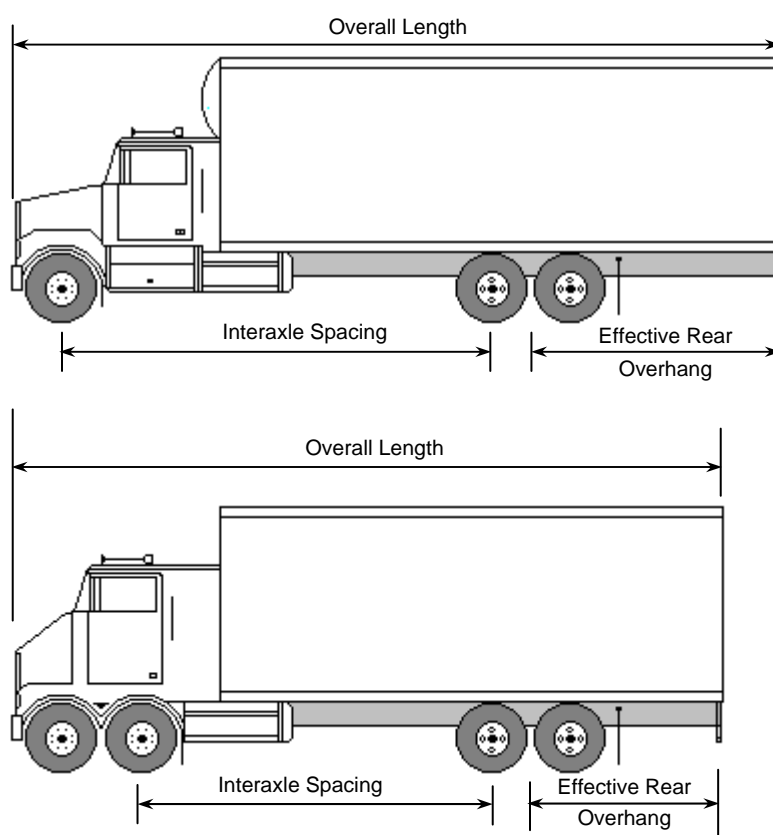


DIMENSION	LIMIT
Overall Length	Maximum 12.5 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Not Controlled
Wheelbase	Not controlled
Tandem Steering Axle Spread	Minimum 1.2 m/Maximum 2.2 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Effective Rear Overhang	Maximum 4.0 m

DIMENSION	LIMIT
Interaxle Spacings	
Single Axle to Single or Tandem Axle	Minimum 3.0 m
Tandem Steering Axle to Tandem Axle	Minimum 3.65 m


Category 5: Straight Truck

Part 2 - Weight Limits

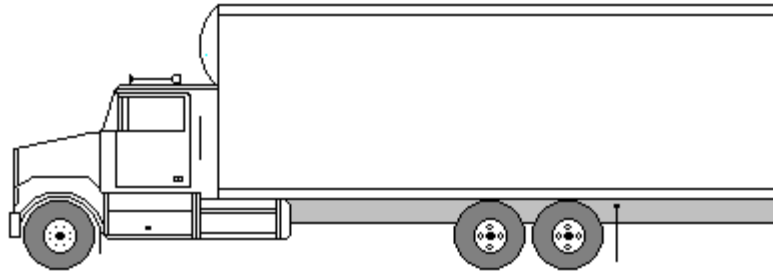

Max 8000 kg*

Single - Max 9100 kg
Tandem - Max 18 000 kg

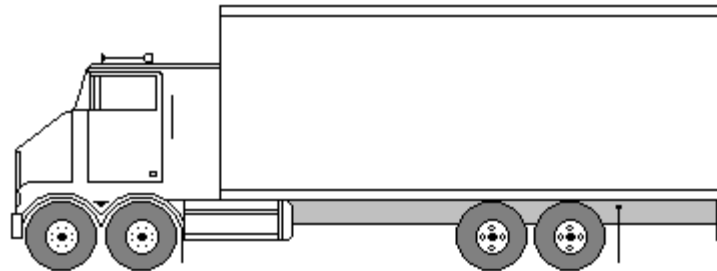

Tandem Steering Axle
Max 16 000 kg

Tandem Drive Axle
Max 18 000 kg

WEIGHT ²⁷	LIMIT
Axle Weights:	
Steering Axle - single axle, single tires	Maximum 8000 kg*
- tandem axle, single tires	Maximum 16 000 kg
Single Axle (dual tires)	Maximum 9100 kg
Tandem Drive Axle:	
Axle Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Gross Vehicle Weight Limits:	
Two Axles	Maximum 17 100 kg


²⁷ See note 18.

WEIGHT²⁸	LIMIT
Three Axles	Maximum 26 000 kg
Four Axles	Maximum 34 000 kg

* The steering axle weight can be as high as 9100 kg provided the load carrying capacity of the axle, tires, and all other components is not exceeded, and the tire loading does not exceed 10 kg per mm of width. However, the Gross Vehicle Weight limit will be based on a steering axle weight of 8000 kg for single steering axle straight trucks.

²⁸ See note 18.

Category 6: Truck - Pony Trailer Combination
Part 1 - Dimension Limits

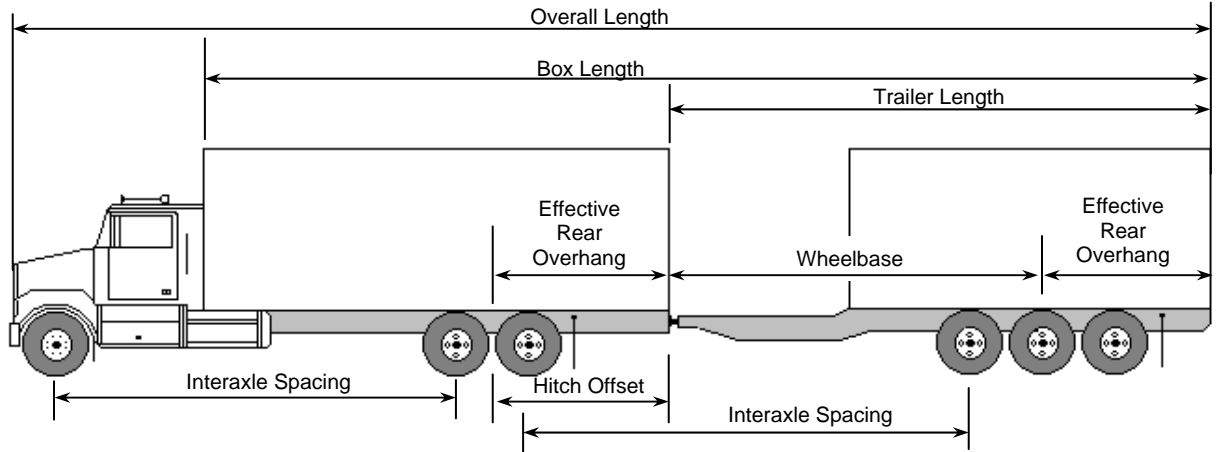

DIMENSION	LIMIT
Overall Length	Maximum 23 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Maximum 20 m
Truck:	
Length	Maximum 12.5 m
Wheelbase	Not controlled
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Effective Rear Overhang	Maximum 4.0 m
Hitch Offset	Maximum 1.8 m
Pony Trailer*	
Length	Maximum 12.5 m
Wheelbase	Minimum 6.25 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Tridem Axle Spread	Minimum 2.4 m/Maximum 3.7 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ²⁹	Minimum 2.45 m/Maximum 2.6 m


²⁹ See note 4.

DIMENSION	LIMIT
Effective Rear Overhang	Maximum 4.0 m
Interaxle Spacings	
Single Axle to Single, Tandem or Tridem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m
Tandem Axle to Tridem Axle	Minimum 5.5 m

* Dimension limits not applicable to pony trailers with Gross Vehicle Weight Rating of less than 10 000 kg.

Category 6: Truck - Pony Trailer Combination

Part 2 - Weight Limits

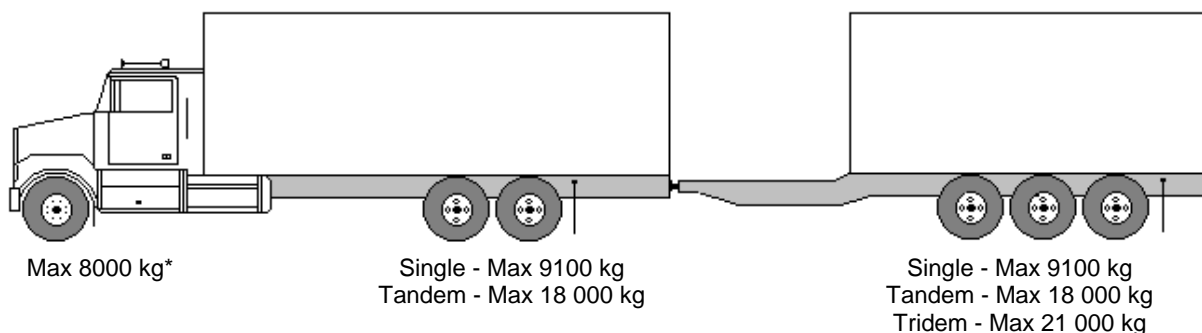


WEIGHTS ³⁰	LIMITS
Axle Weight Limits:	
Steering Axle	Maximum 8000 kg*
Single Axle (dual tires)	Maximum 9100 kg
Tandem Axle:	
Axle Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Tridem Axle:	
Axle Spread 2.4 m - 3.7 m	Maximum 21 000 kg
Gross Vehicle Weight Limits:	
Three Axles	Maximum 26 200 kg
Four Axles	Maximum 35 100 kg
Five Axles	Maximum 44 000 kg
Six Axles	Maximum 47 000 kg

* The steering axle weight can be as high as 9100 kg provided the load carrying capacity of the axle, tires, and all other components is not exceeded, and the tire loading does not exceed 10 kg per mm of width. However, the Gross Vehicle Weight limit will be based on a steering axle weight of 8000 kg.

³⁰ When an axle, other than a steering axle, is fitted with two single tires, each of which has a width of 445 mm or greater, the weight cannot exceed 7700 kg for single axles, 15,400 kg for tandem axle groups and 21,000 kg for tridem axle groups.

Category 7: Tandem Steering Axle Truck - Pony Trailer Combination
Part 1 - Dimension Limits

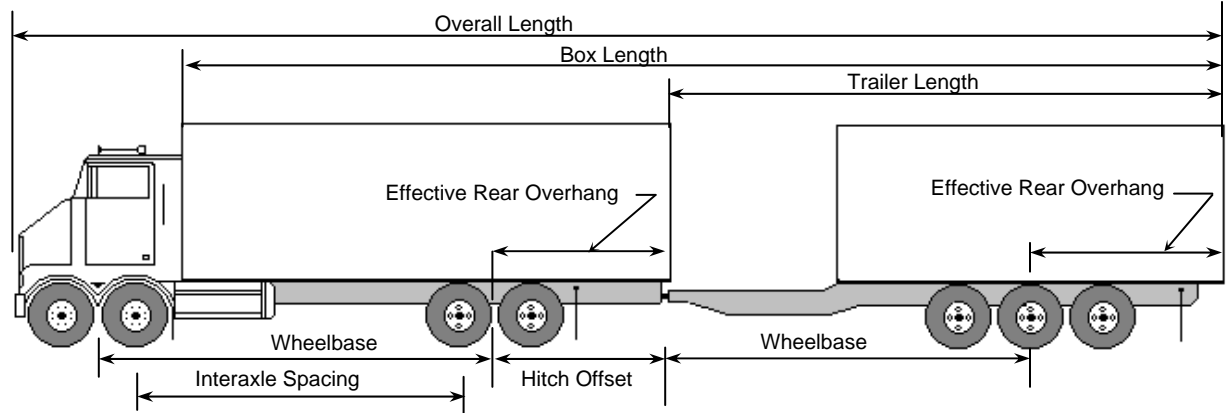

DIMENSION	LIMIT
Overall Length	Maximum 23 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Maximum 20 m
Truck:	
Length	Maximum 12.5 m
Wheelbase	Not controlled
Tandem Steering Axle Spread	Minimum 1.2 m/Maximum 2.2 m
Tandem Drive Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Effective Rear Overhang	Maximum 4.0 m
Hitch Offset	Maximum 1.8 m
Pony Trailer*	
Length	Maximum 12.5 m
Wheelbase	Minimum 6.25 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Tridem Axle Spread	Minimum 2.4 m/Maximum 3.7 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ³¹	Minimum 2.45 m/Maximum 2.6 m
Effective Rear Overhang	Maximum 4.0 m


³¹ See note 4.

DIMENSION	LIMIT
Interaxle Spacings	
Tandem Steering Axle to Tandem Drive Axle	Minimum 3.65 m
Single Axle to Single, Tandem or Tridem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m
Tandem Axle to Tridem Axle	Minimum 5.5 m

* Limits not applicable to pony trailers with Gross Vehicle Weight Rating of less than 10 000 kg.

Category 7: Tandem Steering Axle Truck - Pony Trailer Combination


Part 2 - Weight Limits

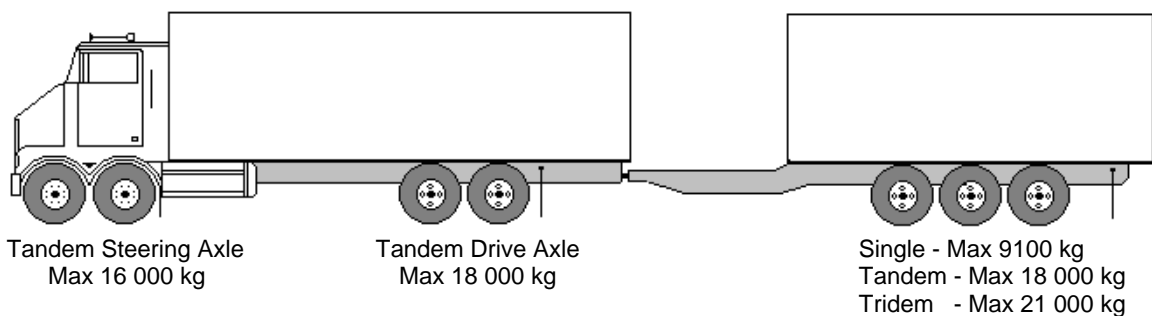

WEIGHTS³²	LIMITS
Axle Weight Limits:	
Truck:	
Tandem Steering Axle: Spread 1.2 m to 2.2 m	Maximum 16 000 kg
Tandem Drive Axle: Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Trailer:	
Single Axle (dual tires)	Maximum 9 100 kg
Tandem Axle: Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Tridem Axle: Spread 2.4 m - 3.7 m	Maximum 21 000 kg
Gross Vehicle Weight Limits:	
Five Axles	Maximum 43 100 kg
Six Axles	Maximum 50 000 kg
Seven Axles	Maximum 53 500 kg

³² See note 30.

Category 8: Truck - Full Trailer Combination
Part 1 - Dimension Limits

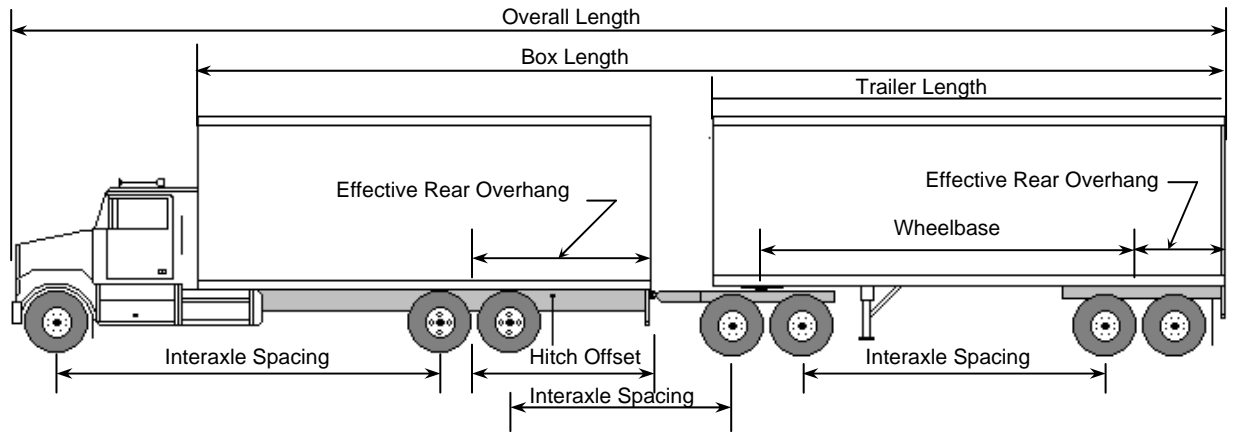


DIMENSION	LIMIT
Overall Length	Maximum 23 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Maximum 20 m
Truck:	
Length	Maximum 12.5 m
Wheelbase	Not controlled
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Effective Rear Overhang	Maximum 4.0 m
Hitch Offset	Maximum 1.8 m
Full Trailer	
Length	Maximum 12.5 m
Wheelbase	Minimum 6.25 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ³³	Minimum 2.45 m/Maximum 2.6 m
Effective Rear Overhang	Maximum 35% of wheelbase

³³ See note 4.

DIMENSION	LIMIT
Converter Dolly	The use of a double drawbar or C Dolly is not permitted on this combination
Interaxle Spacings	
Single Axle to Single or Tandem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m

Category 8: Truck - Full Trailer Combination

Part 2 - Weight Limits

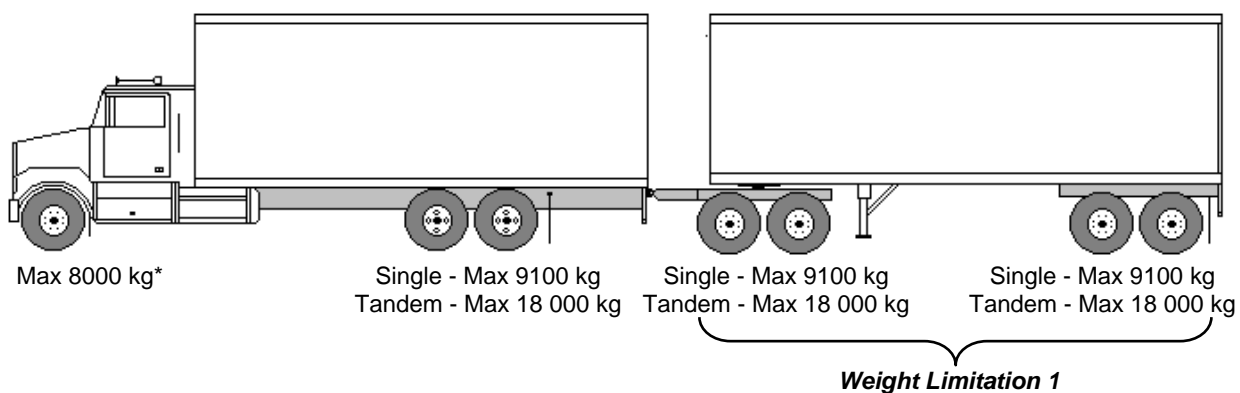


WEIGHT ³⁴	LIMIT
Axle Weight Limits:	
Steering Axle	Maximum 8000 kg*
Single Axle (dual tires)	Maximum 9100 kg
Tandem Axle:	
Axle Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Weight Limitation 1:	
Sum of Axle Weights of Full Trailer	
4 Axle Truck-Trailer Combination	Maximum 17 000 kg
5 Axle Truck-Trailer Combination	Maximum 17 000 kg
6 Axle Truck-Trailer Combination	Maximum 24 000 kg
7 Axle Truck-Trailer Combination	Maximum 31 000 kg
Gross Vehicle Weight Limits:	
Four Axles	Maximum 34 100 kg
Five Axles	Maximum 43 000 kg
Six Axles	Maximum 50 000 kg
Seven Axles	Maximum 53 500 kg

* The steering axle weight can be as high as 9100 kg provided the load carrying capacity of the axle, tires, and all other components is not exceeded, and the tire loading does not exceed 10 kg per mm of width. However, the Gross Vehicle Weight limit will be based on a steering axle weight of 8000 kg.

³⁴ See note 18.

Category 9: Tandem Steering Axle Truck - Full Trailer Combination

Part 1 - Dimension Limits

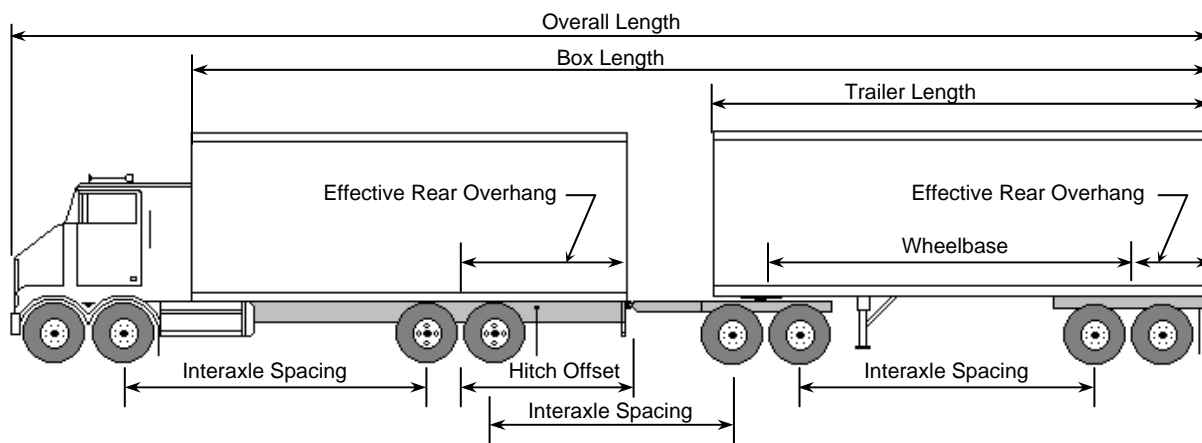


DIMENSION	LIMIT
Overall Length	Maximum 23 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Box Length	Maximum 20 m
Truck:	
Length	Maximum 12.5 m
Wheelbase	Not controlled
Tandem Steering Axle Spread	Minimum 1.2 m/Maximum 2.2 m
Tandem Drive Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Effective Rear Overhang	Maximum 4.0 m
Hitch Offset	Maximum 1.8 m
Full Trailer	
Length	Maximum 12.5 m
Wheelbase	Minimum 6.25 m
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Track Width: With dual tires	Minimum 2.5 m/Maximum 2.6 m
With single tires ³⁵	Minimum 2.45 m/Maximum 2.6 m
Effective Rear Overhang	Maximum 35% of wheelbase

³⁵ See note 4.

DIMENSION	LIMIT
Converter Dolly	The use of a double drawbar or C Dolly is not permitted on this combination
Interaxle Spacings	
Tandem Steering Axle to Tandem Drive Axle	Minimum 3.65 m
Single Axle to Single or Tandem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m

Category 9: Tandem Steering Axle Truck - Full Trailer Combination
Part 2 - Weight Limits

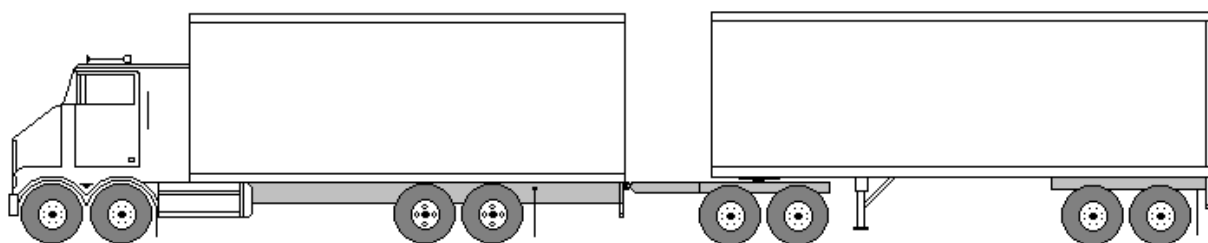

Tandem Steering Axle
 Max 16 000 kg

Tandem Drive Axle
 Max 18 000 kg


Single - Max 9100 kg
 Tandem - Max 18 000 kg

Single - Max 9100 kg
 Tandem - Max 18 000 kg

WEIGHT ³⁶	LIMIT
Axle Weight Limits:	
Tandem Steering Axle	Maximum 16 000 kg
Single Axle (dual tires)	Maximum 9100 kg
Tandem Drive Axle:	
Axle Spread 1.2 m to 1.85 m	Maximum 18 000 kg
Gross Vehicle Weight Limits:	
Six Axles	Maximum 51 000 kg
Seven Axles	Maximum 53 500 kg
Eight Axles	Maximum 53 500 kg

³⁶ See note 18.


Category 10: Intercity Bus
Part 1 - Dimension Limits

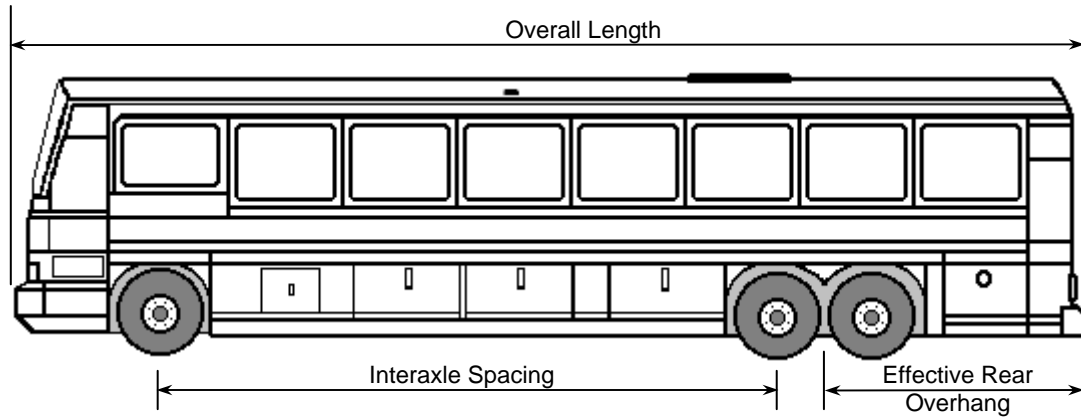

DIMENSION	LIMIT
Overall Length	Maximum 14.0 m
Overall Width	Maximum 2.6 m
Overall Height	Maximum 4.15 m
Wheelbase	Not controlled
Tandem Axle Spread	Minimum 1.2 m/Maximum 1.85 m
Effective Rear Overhang	Maximum 4.0 m
Axle Requirements:	
Overall length 12.5 m or less	Not controlled
Overall length greater than 12.5 m	Minimum 3 axles

Category 10: Intercity Bus

Part 2 - Weight Limits

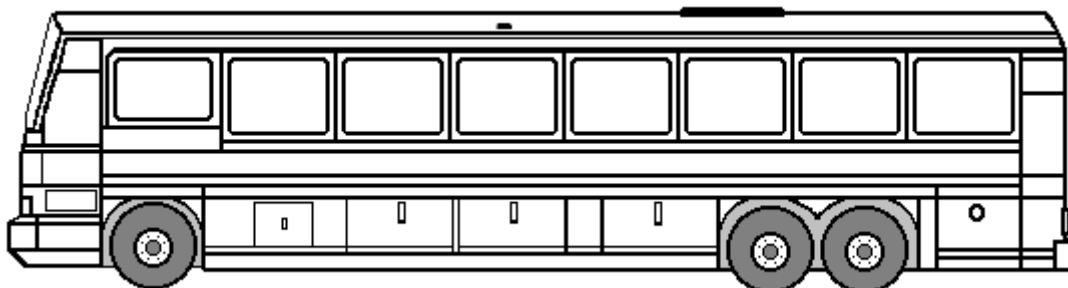

Max 7250 kg*

Single Axle (single tires) - Max 6000 kg
 Single Axle (dual tires) - Max 9100 kg
 Tandem Axle - Max 18 000 kg

WEIGHT	LIMIT
Axle Weights:	
Steering Axle	Maximum 7250 kg*
Single Axle (dual tires)	Maximum 9100 kg
Single Axle (single tires)	Maximum 6000 kg
Tandem Axle (dual tires on both axles)	Maximum 18 000 kg
Gross Vehicle Weight Limits:	
Two axles (4 tires)	Maximum 13 250 kg
Two Axles (6 tires)	Maximum 16 350 kg
Three axles (8 tires)	Maximum 20 900 kg
Three axles (10 tires)	Maximum 25 250 kg

* The steering axle weight can be as high as 9100 kg provided the load carrying capacity of the axle, tires, and all other components is not exceeded, and the tire loading does not exceed 10 kg per mm of width. However, the Gross Vehicle Weight limit will be based on a steering weight of 7250 kg.

82/17 s1