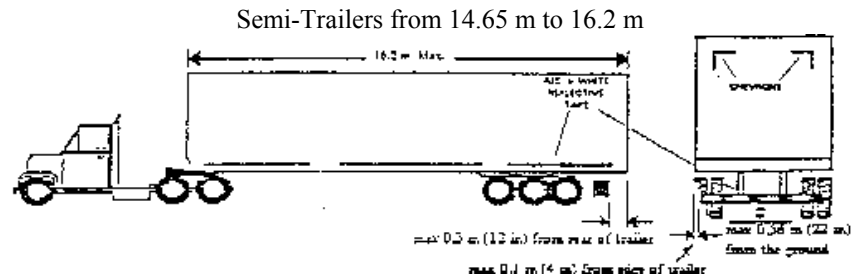


Schedule E

1. Semi-trailers greater than 14.65 metres in length may not be equipped with a liftable axle.
2. Semi-trailers greater than 14.65 metres in length and manufactured after July 14, 1993 must be equipped with the following conspicuity requirements:
 - Alternating red and white reflective tape 5 cm wide along the sides and rear of the trailer.
 - As close to 1.2 m above the road as possible.
 - Must cover at least half the trailer length.
 - No more than 2/3 in one colour.
 - Alternating red and white reflective segments along the rear under ride protection.
 - White reflective chevron 30 cm long in upper corners of rear.

Semi-trailers greater than 14.65 metres in length and manufactured on or before July 14, 1993 must be equipped with the above conspicuity requirements by January 1, 2002.

3. Semi-trailers greater than 14.65 metres in length and built after July 14, 1993 and
 - (a) equipped with sliding axles or fixed axles with more than 0.3 m rear overhang; or
 - (b) the bottom of the rear structure of the trailer is more than 0.56 m above the ground must be equipped with rear under ride protection of adequate strength and conforming to the dimensions specified in the above diagram.
4. Semi-trailers greater than 14.65 metres in length and manufactured after October 1994 must be equipped with automatic slack adjusters.

82/17 s1