


**Category S1: Stinger Steer Automobile or Boat Carrier**

**Part 1 - Dimension Limits**

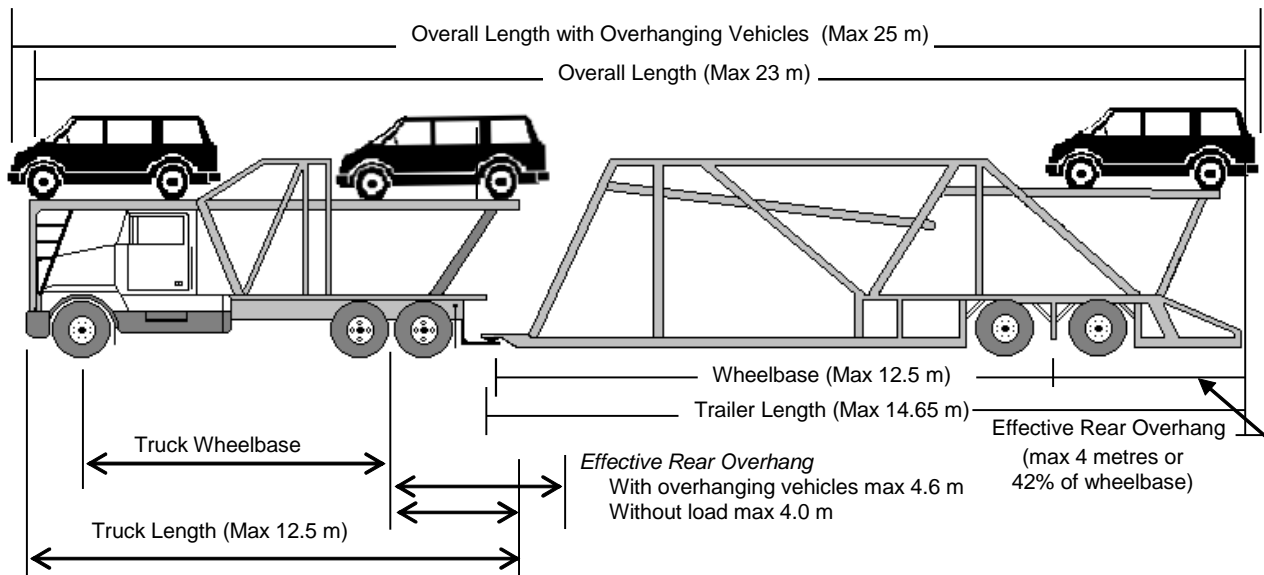


DIMENSION	LIMIT
<b>Overall Length</b>	
- without load	Maximum 23 m
- when loaded with overhanging motor vehicles or boats	Maximum 25 m
<b>Overall Width</b>	Maximum 2.6 m
<b>Overall Height</b>	Maximum 4.3 m
<b>Truck:</b>	
Overall Length	Maximum 12.5 m
Wheelbase	Not Controlled
Tandem Axle Spread	Min 1.2 m/Max 1.85 m
Fifth wheel offset (behind centre of drive axle or axle group)	Not controlled
Load Overhang at front of tractor (beyond tractor bumper)	Maximum 1.0 m
Effective Rear Overhang - without load	Maximum 4.0 m
- when loaded with overhanging motor vehicles or boats	Maximum 4.6 m
<b>Semitrailer</b>	
Length	Maximum 14.65 m
Wheelbase	Min 6.25 m/Max 12.5 m
Effective Rear Overhang (excluding overhanging load)	Maximum 4 m or 42% of wheelbase, whichever is greater
Load Overhang at Rear of Semitrailer (provided width of overhang does not exceed 2.3 m)	Maximum 1.2 m
Tandem Axle Spread	Min 1.2 m/Max 1.85 m
<b>Interaxle Spacing</b>	
Single Axle to Single or Tandem Axle	Minimum 3.0 m
Tandem Axle to Tandem Axle	Minimum 5.0 m

Note: Extendable support plates are considered to be part of the load.

**Category S1: Stinger Steer Automobile or Boat Carrier**

**Part 2 - Weight Limits**

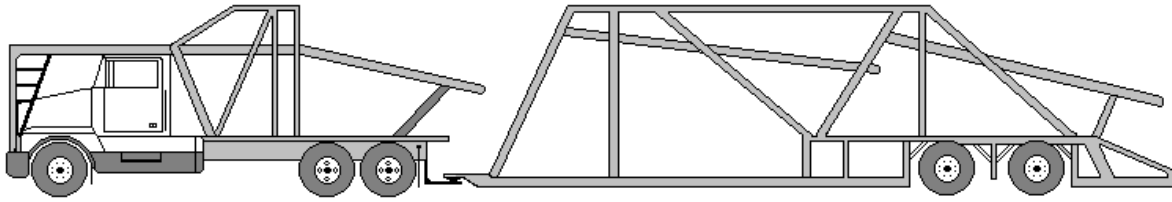

Max 6000 kg

Single Axle - Max 9100 kg  
Tandem Axle - Max 17 000 kg

Single Axle - Max 9100 kg  
Tandem Axle - Max 17 000 kg

WEIGHT	LIMIT
<b>Axle Weights:</b>	
Steering Axle	Maximum 6000 kg
Single Axle (dual tires)	Maximum 9100 kg
<b>Tandem Axle:</b>	
Axle Spread 1.2 m - 1.85 m	Maximum 17 000 kg
<b>Gross Vehicle Weight:</b>	Sum of Axle Weights
Three Axles	Maximum 24 200 kg
Four Axles	Maximum 32 100 kg
Five Axles	Maximum 40 000 kg